


PROJECT

FIXTURE TYPE

The SLP Pendant is an innovative small scale pendant series that provides a discreet and delicate source of illumination to integrate seamlessly into architecture. The SLP series is available in direct, indirect and direct/indirect versions.


## PHOTOMETRICS

power  
48 watts  
  
lumens  
5400 lm

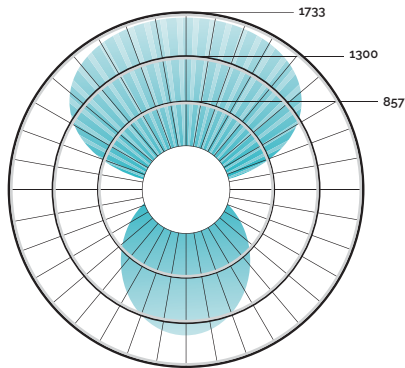

\*preliminary photometric data shown for 7x5 4' fixture @ 3000K

## TECHNICAL DRAWING

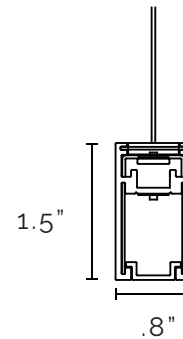

## FEATURES

### direct output

low output: 3.5w per foot 300 lumens per foot  
standard output: 5w per foot 400 lumens per foot

### indirect output

standard output: 5w per foot 625 lumens per foot  
high output: 7w per foot 875 lumens per foot

### features

available as individual fixtures or in a run configuration, uplight and downlight may be controlled together or separately

### materials

extruded aluminum LED fixture body with frosted acrylic lensing

### options

90° connectors, consult factory for other angles  
custom colors and mounting available upon request

### driver

remote 120-277v driver with optional dimming controls

### certifications

UL Listed, Made in the USA



**LIGHTENGINE**

SLP - PENDANT

**ORDERING**

LUMINAIRE

SLP

INDIRECT  
OUTPUT

5 - 5w per foot  
7 - 7w per foot

DIRECTION

D - direct  
I - indirect  
DI - direct/indirect

COLOR TEMPERATURE

27K - 2700K  
30K - 3000K  
35K - 3500K  
40K - 4000K

LENGTH

24 - 23.5"  
36 - 35.5"  
48 - 47.5"  
72 - 71.5"  
96 - 95.5"  
RUN - continuous

MOUNTING

AC - aircraft cable  
PS - power suspension

DIRECT  
OUTPUT

3 - 3.5w per foot  
5 - 5w per foot

FINISH

WH - white  
NA - natural aluminum  
RAL

OPTIONS

ND - non dimming  
0-10V - 0-10V dimming  
OTHER - specify  
CORNERS

EXAMPLE

SLP-DI-72"-5-5-30K-AC-NA-0-10V



DIRECT/INDIRECT



DIRECT



INDIRECT