



LIGHTENGINE

RFX - COVE LIGHT




PATENT PENDING

PHOTOMETRICS


power
28 watts

lumens
3400 lm*

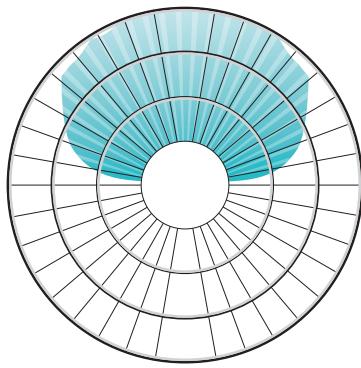

*preliminary photometric data shown for 4' fixture @ 3000K

TECHNICAL DRAWING

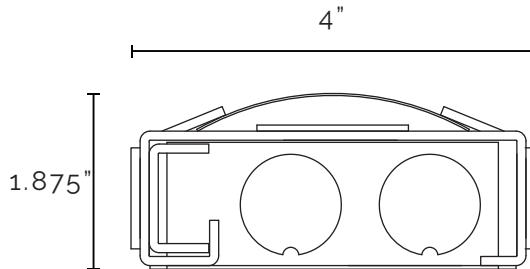

PROJECT

Fixture Type

The RFX Cove Light is a lay in cove luminaire for field built cove applications capable of being installed into curved or straight cove pockets to allow for maximum flexibility to integrate into every design. The RFX Cove Light is provided with integral drivers and knock outs to allow for continuous fixture runs.

output

5w per foot - 650 lumens per foot
7w per foot - 850 lumens per foot
9w per foot - 1050 lumens per foot
11w per foot - 1250 lumens per foot

curve requirements

fixture can be installed in straight runs or in complex curves with a minimum radius of 10' - smaller radius can be provided as needed

driver

integral 120-277v driver with 0-10V dimming

materials

flexible aluminum body with sateen film diffuser

options

alternate drivers available - EM ready

certifications

UL Listed, Made in the USA

ORDERING

SERIES

RFX

RFX Cove Light

POWER

5W

9W

7W (STANDARD)

11W

COLOR TEMP.

30K - 3000K 40K - 4000K

35K - 3000K

CONTROL

D - 0-10V

OTHER - specify

ELV - (120V only)

OPTIONS

Special Length

Tight Radius