




PROJECT

FIXTURE TYPE


The Flex Cove standalone fixture series allows for the use of high performance, small scale, LED fixtures that can be used in seamless straight or curved runs. Perfect for installations in an existing or field built architectural pocket or shelf.

LUMINAIRES

BAR SYMMETRIC

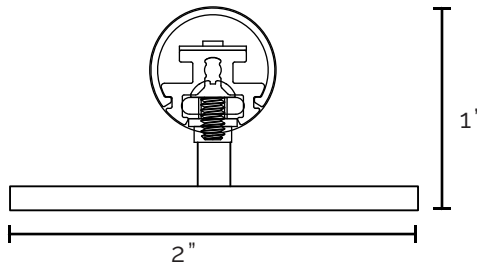


ASYMMETRIC

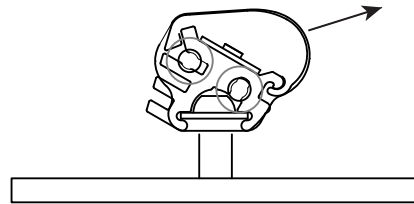


PHOTOMETRICS

BAR SYMMETRIC

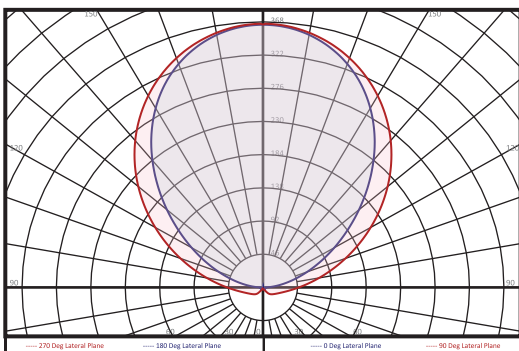

ASYMMETRIC

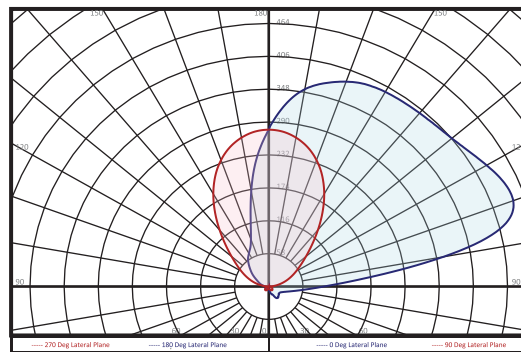

PAT. 10,295,132



FEATURES

output

low output: 3w per foot 360 lumens per foot
mid output: 6w per foot 700 lumens per foot
high output: 9w per foot 1030 lumens per foot
95+ CRI

optics

frosted acrylic lens

curve requirements

fixture can be installed in straight runs or in complex curves with minimum radius of 6"

materials

extruded aluminum LED fixture with white screw down styrene mounting plates

driver

remote 120-277v driver with 0-10V dimming controls provided as standard, alternates can be specified

options

2000K, 2200K, 2400K available on request
consult factory for modification requests
mounting plates can be provided in alternate fixture heights in 1/4" increments up to 1-3/4" overall height

certifications

cULus Listed, JA8 or damp available, Made in the USA

INSTALLATION INSTRUCTIONS

ORDERING

LUMINAIRE

SA-

SPECIALTY
OPTIONS

BAR - symmetric output
ASY - asymmetric output

RGB (5W) symmetric only
RGBW (7W) symmetric only
DIM TO WARM - 19K-30K or 19K-27K(6W)
COLOR TUNING - 20/27, 20/30, 27/40, 27/55 (1.5W, 2.5W, 4W)
JA8

OUTPUT

3 - 3w per foot output
6 - 6w per foot output
9 - 9w per foot output

CONTACT FACTORY FOR WATTAGES AVAILABLE IN SPECIALTY OPTIONS

CONTROL

0-10V - 0-10V dimming (1%)
PEQ - Hi-Lume Premier 0.1% SOFTB
ATHENA - RF 1%
(static white or color tuning)
OTHER - consult factory
PHASE/0-10V - 0.1% dimming
POE - specify POE controller
DMX - DMX decoder

COLOR TEMPERATURE

27K - 2700K
30K - 3000K
35K - 3500K
40K - 4000K

EXAMPLE
SA-BAR-3-0-10V-30K

PAT. 10,295,132