



PROJECT

Fixture Type

The GLS Flex Cove is a revolutionary product series that creates a small profile cove capable of being field curved in order to follow complex shapes and designs. The GLS Flex Cove provides a clean and consistent architectural detail that allows for easy installation of indirect linear LED fixtures.

SPECIFICATION CODE BUILDER

TYPE	LENS	DYNAMIC CCT	POWER SUPPLY	OPTIONS
GLS				
	FWD	RGB	DMX	*ADJUSTABLE CLIP (ASY ONLY)
	BAR	RGBW	DALI	30' FEED CABLE 75' FEED CABLE 100' FEED CABLE ACUSTABULT (7/8") JUMPER CABLE EM

LUMINARE DETAILS

LENS

FWD* forward throw
BAR symmetric

REMOTE POWER SUPPLY


DMX
DALI 0.1%

DYNAMIC COLOR TEMPERATURE (95+CRi)

RGB (5W)
RGBW (5W)

TECHNICAL DRAWINGS

GLS - FWD

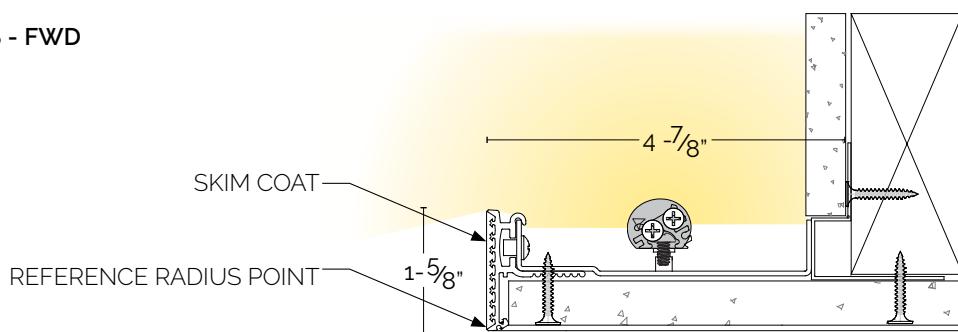

PAT.10,295,132



FEATURES

OPTICS

frosted acrylic lens
frosted asymmetric collimator

INSTALLATION

for best results cove framing system should be installed by carpenter, finished with sheet rock, tape and skim coat before light fixture installation. LED fixtures snap on to mounting posts in cove framing.

MATERIALS

aluminum flexible cove framing system, flexible continuous face plate for skim coat, extruded aluminum LED fixture comes standard with 2' feed

OPTIONS


jumper cable 6 foot
adjustable mounting clip (ASY only)
2000K, 2200K, 2400K available on request
acoustabult 7/8" acoustic ceiling
consult factory for modification requests

CERTIFICATIONS


cULus Listed, JA8 and damp listings available
Made and designed in the USA

LUMINARES


FWD - FORWARD THROW

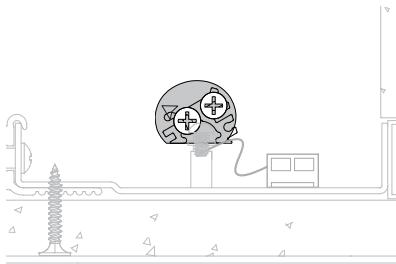

BAR - SYMMETRIC

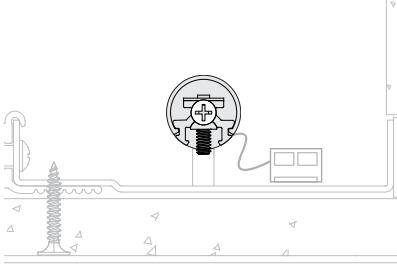


ASY - ASYMMETRIC

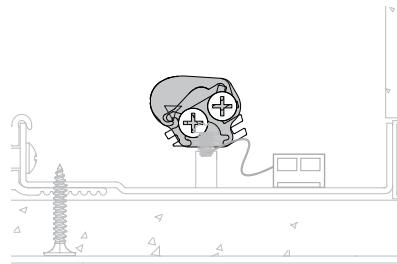

PHOTOMETRICS

*ALL PHOTOMETRIC DATA SHOWN FOR 10W/FT 4' FIXTURE @ 3000K


FWD

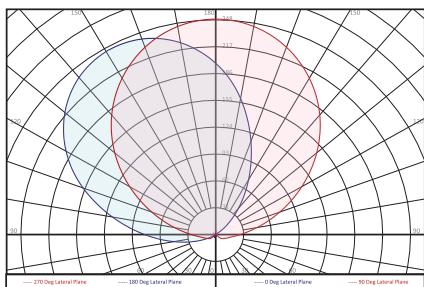

POWER
38 watts

LUMENS
4370 lm


BAR

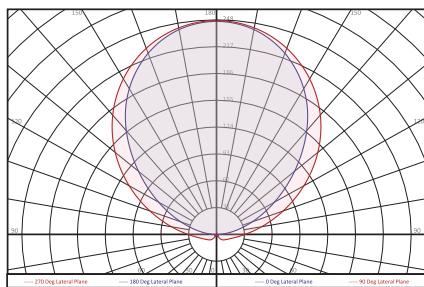

POWER
38 watts

LUMENS
4370 lm

ASY

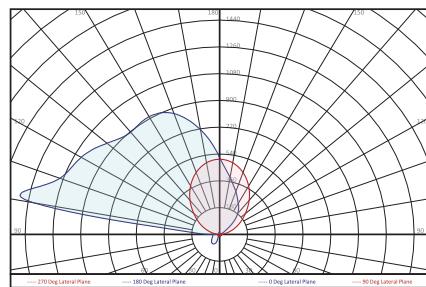

POWER
38 watts

LUMENS
3640 lm


PAT.10,295,132



CORNER KIT GUIDE

CORNER REQUIREMENTS

Fixture can be installed in straight runs or in complex curves. Framing system is dynamically flexible down to a 6" minimum radius.

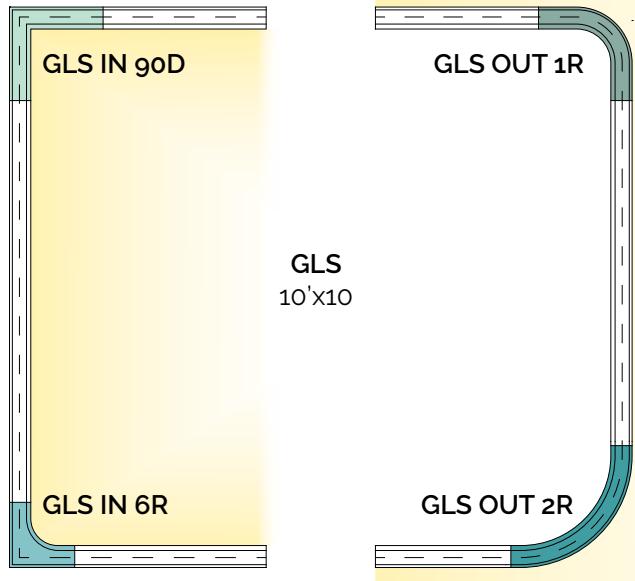


PAT.10,295,132




INSIDE CORNER KIT GUIDE


GLS IN 6R

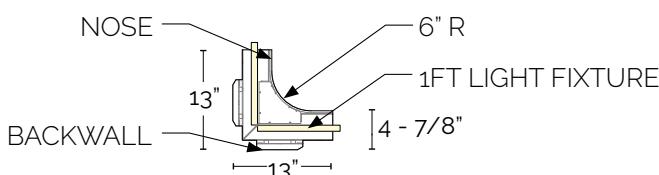


GLS IN 90D




GLS IN 12R



GLS IN 18R




GLS IN 24R




OUTSIDE CORNER KIT GUIDE


GLS OUT 6R

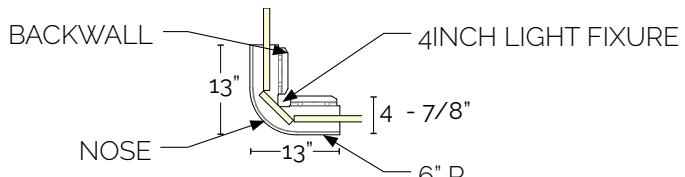


GLS OUT 90D

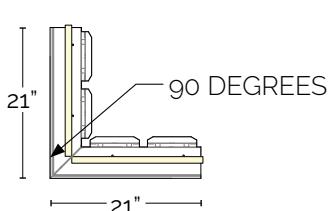


GLS OUT 12R



GLS OUT 18R

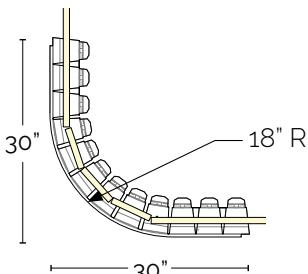


GLS OUT 24R

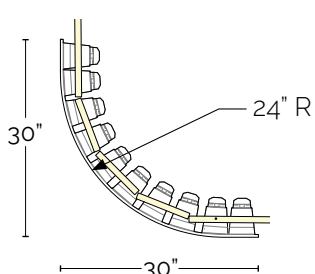


CONSULT FACTORY FOR ADDITIONAL CORNER OPTIONS

OPTIONS


DRIVER BOX 12" X 6" X 12"



INPUT WHIP



JUMPER CABLE 6FT



PAT.10,295,132