



PROJECT

FIXTURE TYPE

The standalone series is a low profile, powerful performance cove solution for use in field built coves, millwork details and retrofit applications.

SPECIFICATION CODE BUILDER

TYPE	LENS	LUMENS	CCT	POWER SUPPLY	OPTIONS
SA					
	FWD	350	27K	0-10V	30' FEED CABLE
	BAR	700	30K	0-10V 0.01%	75' FEED CABLE
	ASY	1000	35K	PHASE	100' FEED CABLE
			40K	DALI	JUMPER CABLE
				L3Do	EM
				ATHENA	

EXAMPLE: SA - ASY - 700 - 30K - 010V

LUMINAIRE DETAILS

LENS

FWD* forward throw
BAR symmetric
ASY performance asymmetric

ELECTRICAL CONFIGURATION

LUMENS	WATTAGE/FT	MAX RUN LENGTH (TYPICAL)
350	3	30 FT
700	6	15 FT
1000	9	10 FT

COLOR TEMPERATURE (95+CRI)

27K - 2700K
30K - 3000K
35K - 3500K
40K - 4000K


REMOTE POWER SUPPLY

0-10V - dimming (1%)
0-10V 0.1% PHASE - 0.1% dimming QTL QZ driver
L3Do - Hi-Lume Premier 0.1% SOFTB - 3 wire + EcoSystem
DALI 0.1%
LUTRON - ATHENA RF 1% dimming (static white)

LUMINAIRES


FWD - FOWARD THROW

DISTANCE FROM CEILING 6"+

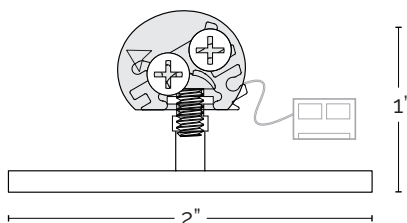


BAR - SYMMETRIC

DISTANCE FROM CEILING 12"+

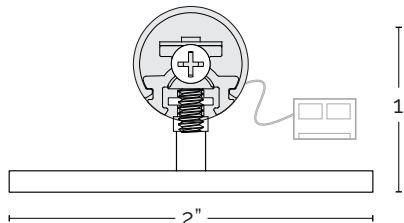

ASY - ASYMMETRIC

DISTANCE FROM CEILING 4" -12"

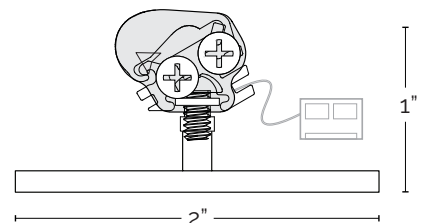

PAT.10,295,132

FEATURES

OPTICS

frosted acrylic lens
 frosted asymmetric collimator

INSTALLATION

for best results cove framing system should be installed by carpenter, finished with sheet rock, tape and skim coat before light fixture installation. LED fixtures snap on to mounting posts in cove framing,

MATERIALS

aluminum flexible cove framing system, flexible continuous face plate for skim coat, extruded aluminum LED fixture comes standard with 2' feed

CERTIFICATIONS

cUL Listed, JA8 and damp listings available
 Made and designed in the USA

OPTIONS

jumper cable 6 foot
 2000K, 2200K, 2400K available on request
 consult factory for modification requests


RECOMMEND GAUGES FOR REMOTE WIRE DISTANCE:

	MAX. REMOTE DISTANCE
18 AWG	30 FT
16 AWG	50 FT
14 AWG	75 FT
12 AWG	100FT

PHOTOMETRICS

*ALL PHOTOMETRIC DATA SHOWN FOR 10W/FT 4' FIXTURE @ 3000K


FWD

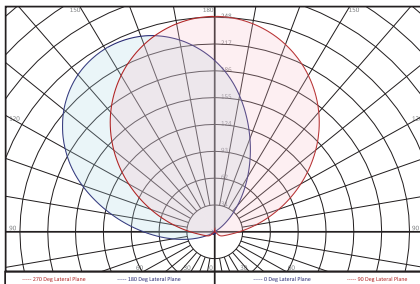

POWER
38 watts

LUMENS
4370 lm


BAR

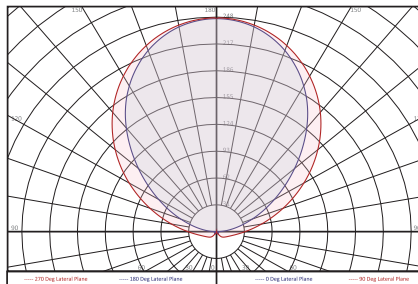

POWER
38 watts

LUMENS
4370 lm

ASY

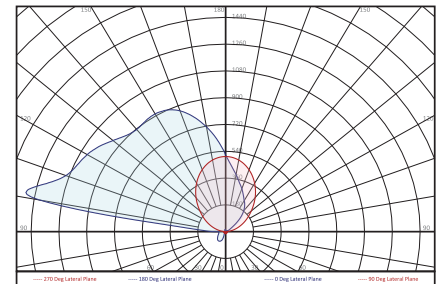


POWER
38 watts


LUMENS
3640 lm

OPTIONS


DRIVER BOX
12" X 6" X 12"



INPUT WHIP



JUMPER CABLE
6FT



PAT.10,295,132